


Ground floor

Open hall, $\approx 270 \text{ m}^2$ net ($\varnothing 19.1 \text{ m}$ inside)
Clear height 3.56 m (3.34 m under the beams)
10 tree pillars on $\varnothing 8.70 \text{ m}$ carry the ring beam
around the net opening ($\varnothing 8.50 \text{ m}$, above)
Annex: entrance, changing, showers, WC, tech
Underfloor heating throughout (see notes)

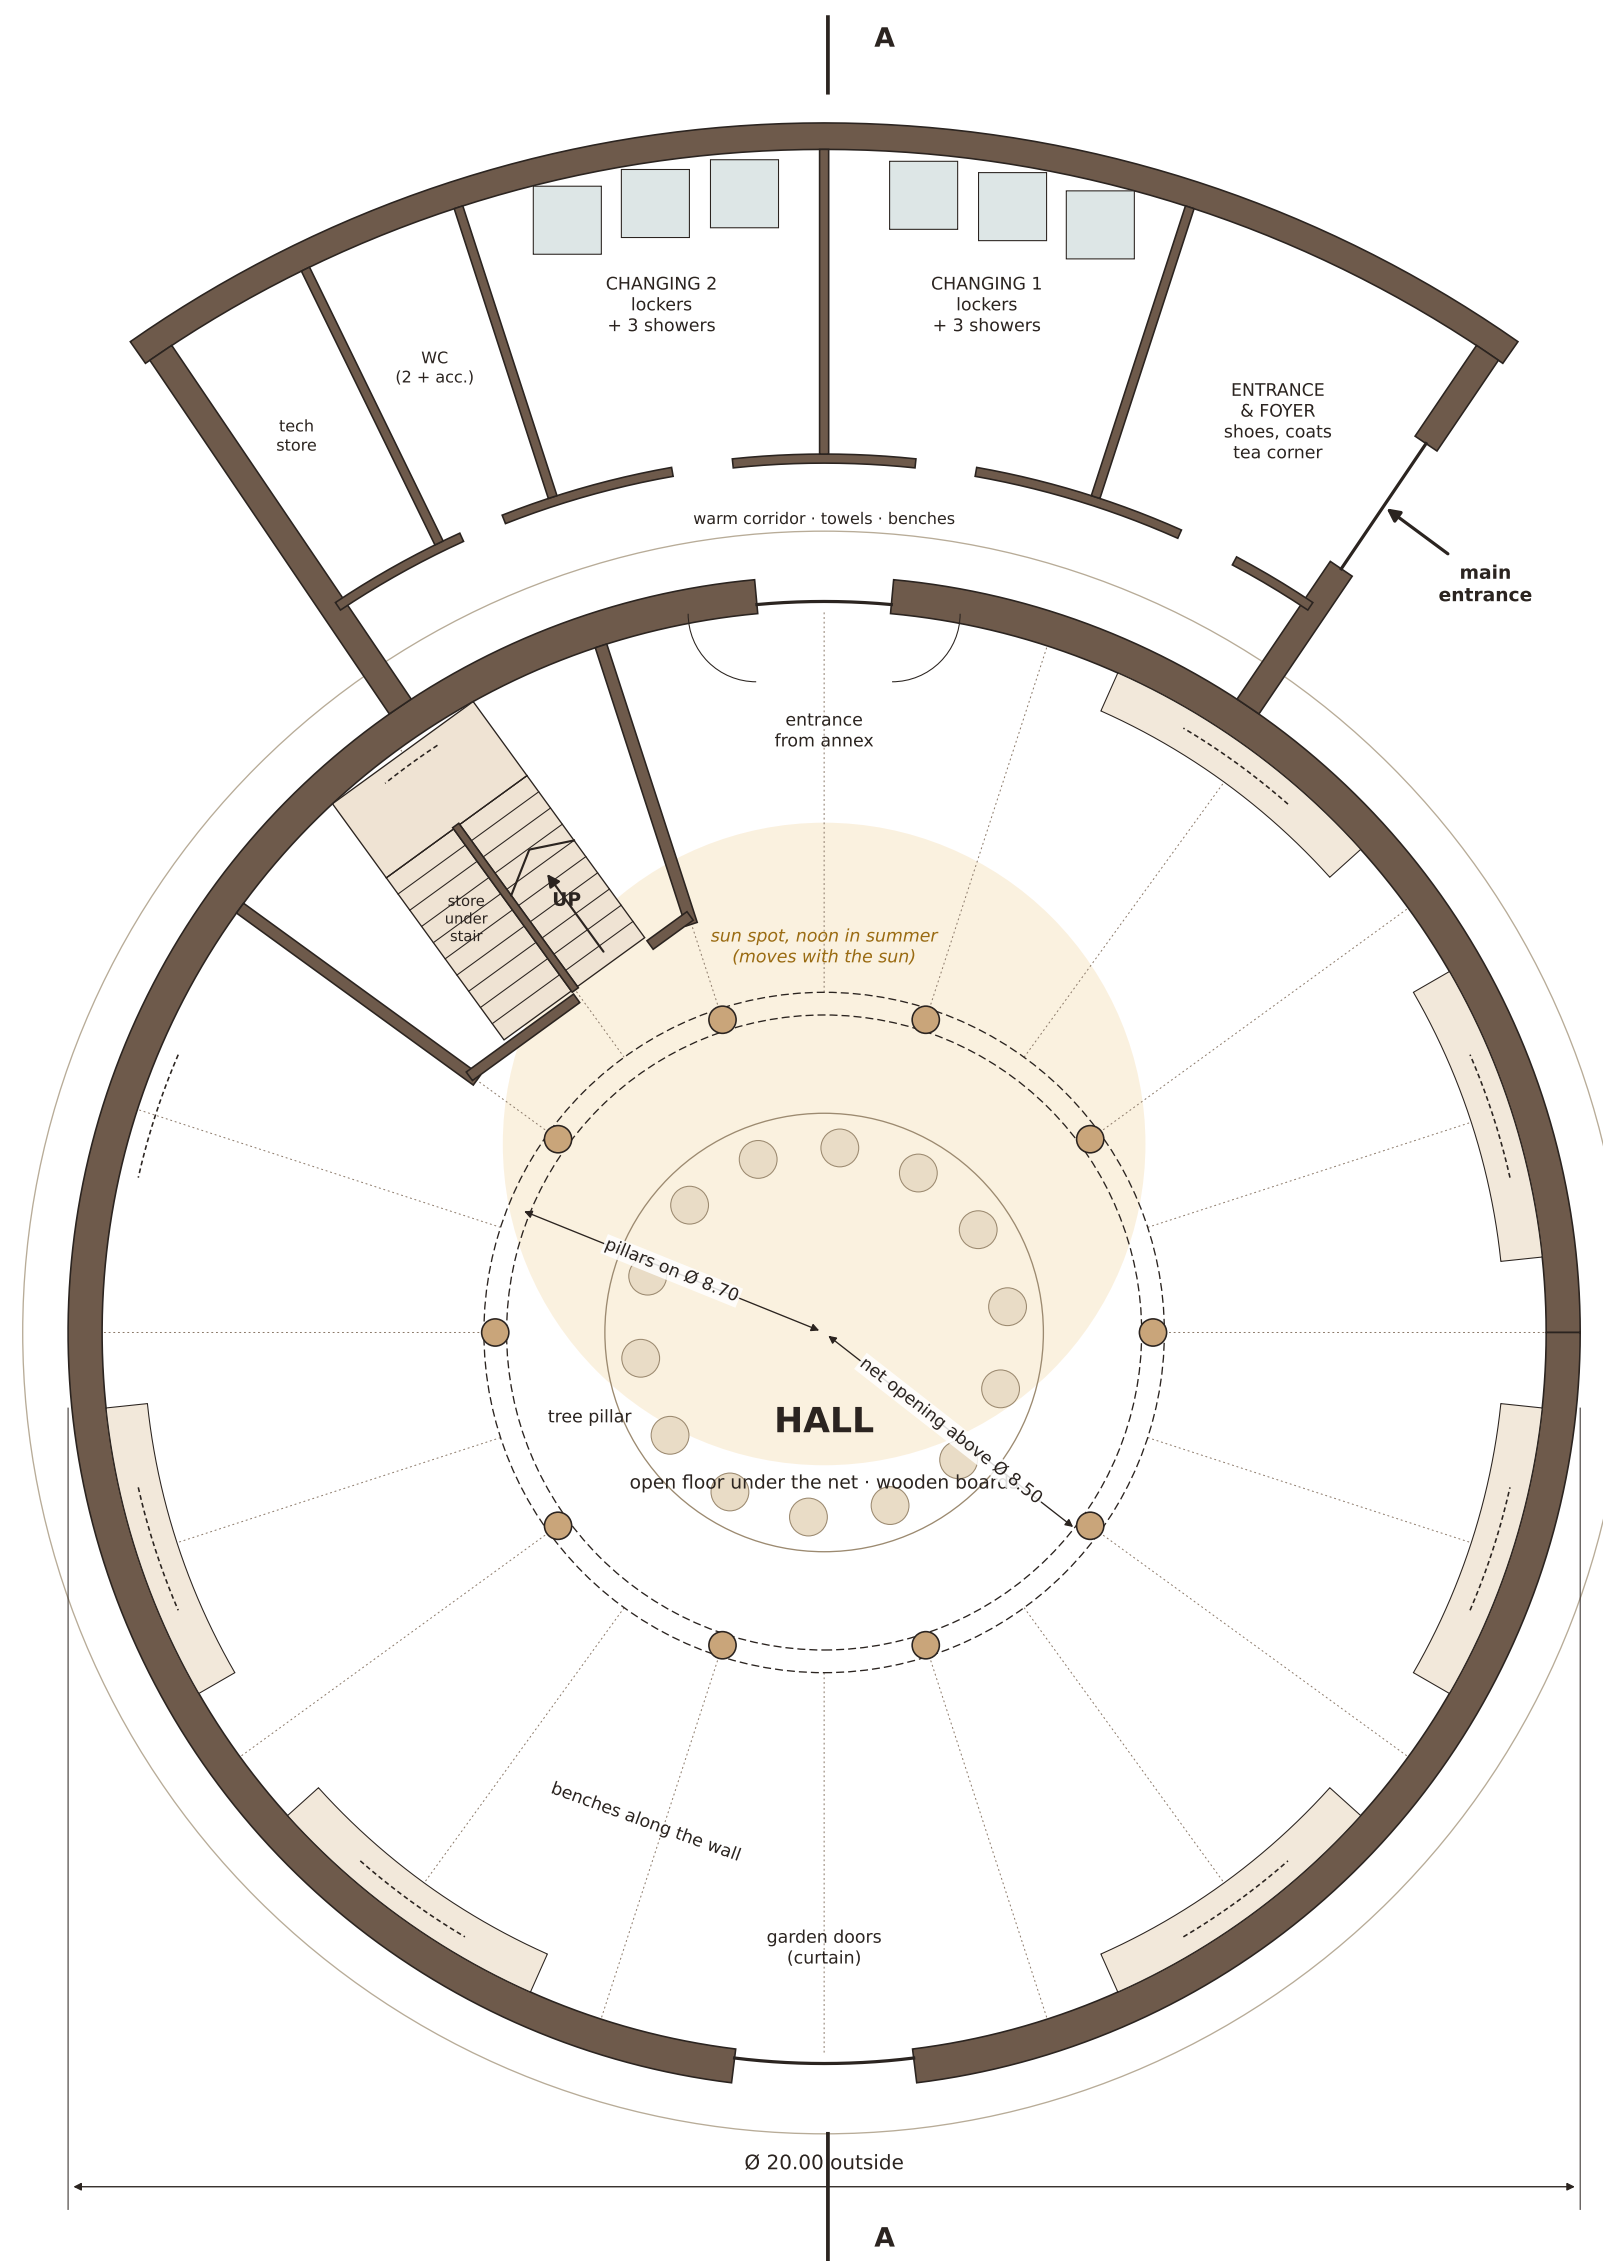

Legend

-  cut wall (clay / timber frame)
-  wooden pillar (tree)
-  above: ring beam / beams / windows
-  sun spot through dome + net

Heating & comfort

- Underfloor heating (low-temp., heat pump) in hall, rooms, annex – floors ~26–28 °C
- Air ~24–26 °C for undressed use; hall and rooms zoned separately
- Balanced ventilation with heat recovery, dome vent at the crown for summer purge
- Clay plaster buffers humidity and sound